

4


3

2



1

THIS DRAWING UNPUBLISHED.	RELEASED FOR PUBUCATION
---------------------------	-------------------------

LOC	DIST	REVISIONS					
---	---	P	LTR		DATE	DWN	APVD
			---	---	---	---	---

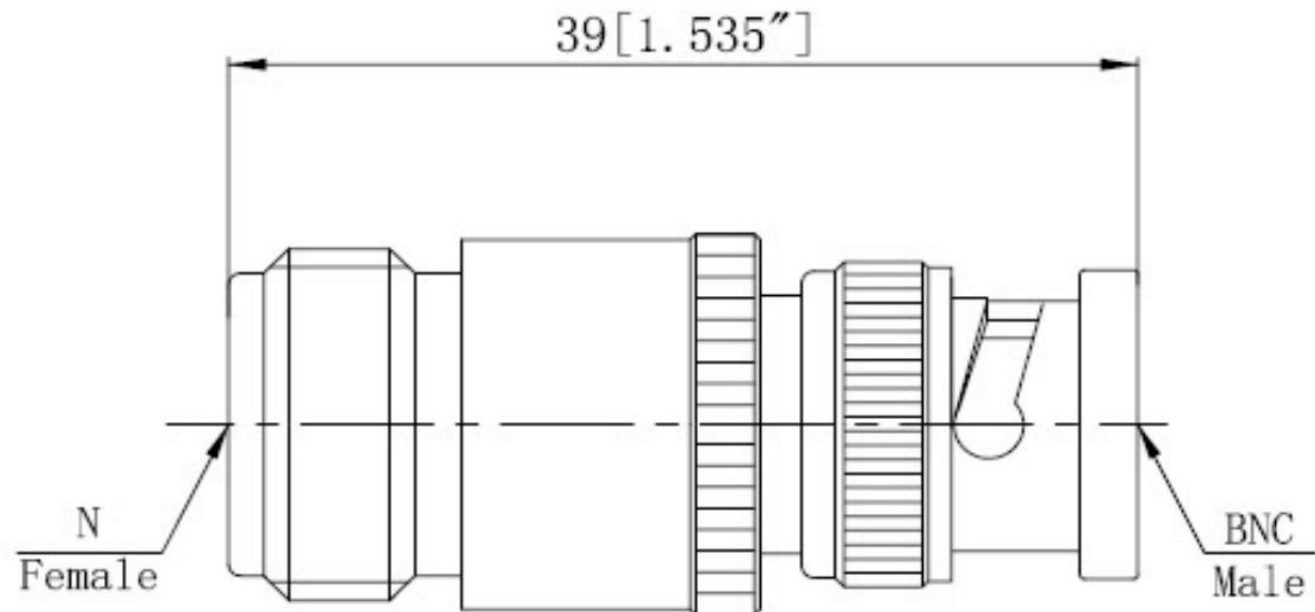

- NOTES:
- ELECTRICAL:
    - IMPEDANCE: 50Ω
    - INSULATION RESISTANCE: 5000M Ω
    - FREQUENCY RANGE: DC-4GHz
    - DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
    - VSWR: ≤1.15:1 (MAX)
    - INSERTION LOSS: 0.20dB (MAX)
  - ENVIRONMENTAL:
    - TEMPERATURE RANGE: -55° to +165°
  - MATERIAL AND FINISH:
    - INNER CONDUCTOR MATERIAL: BERYLLIUM BRONZE GOLD PLATING
    - EXTERNAL CONDUCTOR MATERIAL: BRASS PLATED TERNARY ALLOY
    - INSULATOR: PEI

THIS DRAWING IS A CONTROLLED DOCUMENT		21/10/2021	 Shenzhen xinqiyuan Technology Co., Ltd.						
		CHK							
DIMENSIONSMM		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME						
		0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 ANGLES ±1°	APVD		N Female TO BNC Male RF Coaxial Adapter				
			APPLICATION SPEC	---	SIZE A4	CAGE CODE 01021	DRAWING NO N/BNC-KJSD		
MATERIAL SEE TABLE		FINISH SEE TABLE	CUSTOMER DRAWING			SCALE 2:1	SHEET 1	OF 1	RVE 1

4

3

2

1